


## SWING DOORS

### AUTOMATIC MULTIPOINT LOCK, 92mm BETWEEN AXES

## 2A2NM RANGE **iself**

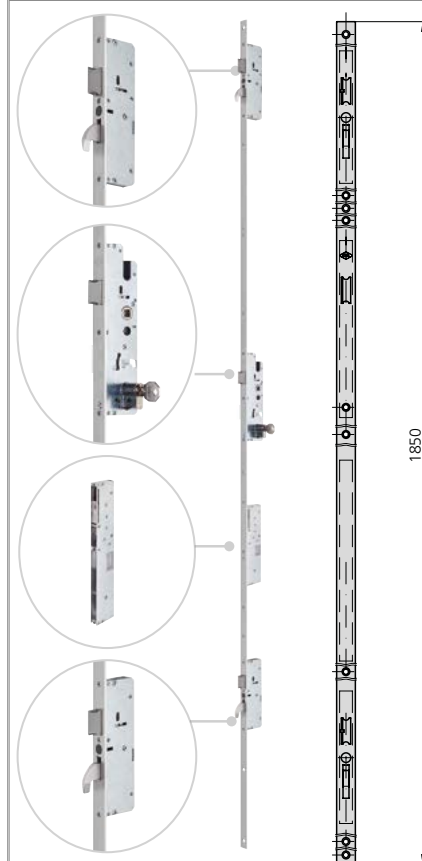

#### CHARACTERISTIC

- Automatic lock system by 3 latch bolts and 2 hook up/down dead bolts
- Automatic shooting of the (independent) hook up/down dead bolts by magnetic technology
- Box depth 15mm: avoids the machining of the profile at the back of the box
- Handle tied passing at 21,5mm ↓ and up to 45mm ↑
- 16mm, 22mm, 24mm SS flat front plate and 24,5\*6 "U" shape SS front plate
- Reversible latch bolts through semi-automatic system
- 15mm closed box
- 8mm square ruler
- Strike plate according to the lock
- Cylinder set screw


#### OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

#### OTHER OPTIONS

- Possibility of different front heights

| DESCRIPTION | REF. | MEASUREMENTS |   | CAM | FINISH      |          | UNITS |
|-------------|------|--------------|---|-----|-------------|----------|-------|
|             |      | B            | A |     | FRONT PLATE | CYLINDER |       |

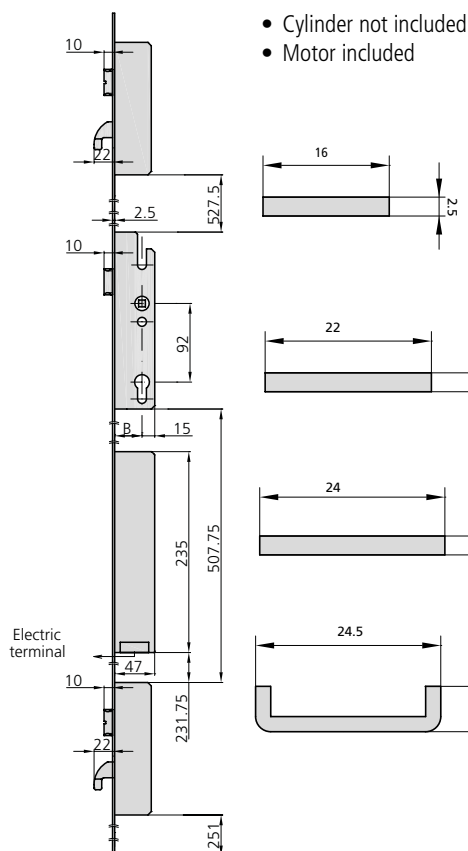

|              |    |    |    |    |  |   |
|--------------|----|----|----|----|--|---|
| P2A2NM30/6   | 27 | 42 | 15 | Al |  | 1 |
| P2A2NM35/6   | 32 | 47 | 15 | Al |  | 1 |
| P2A2NM45/6   | 42 | 57 | 15 | Al |  | 1 |
| P2A2NM60/6   | 57 | 72 | 15 | Al |  | 1 |
| 2A2NM30/6L   | 27 | 42 | 15 | Al |  | 1 |
| 2A2NM35/6L   | 32 | 47 | 15 | Al |  | 1 |
| 2A2NM45/6L   | 42 | 57 | 15 | Al |  | 1 |
| 2A2NM60/6L   | 57 | 72 | 15 | Al |  | 1 |
| 2A2NM30/6LAN | 27 | 42 | 15 | Al |  | 1 |
| 2A2NM35/6LAN | 30 | 45 | 15 | Al |  | 1 |
| 2A2NM45/6LAN | 32 | 47 | 15 | Al |  | 1 |
| 2A2NM60/6LAN | 57 | 72 | 15 | Al |  | 1 |
| 2A2NM30/6U   | 23 | 38 | 15 | Al |  | 1 |
| 2A2NM35/6U   | 28 | 43 | 15 | Al |  | 1 |
| 2A2NM45/6U   | 38 | 53 | 15 | Al |  | 1 |
| 2A2NM60/6U   | 53 | 68 | 15 | Al |  | 1 |