


SWING DOORS

SLIDING DEAD BOLT MULTIPOINT LOCK, 92mm BETWEEN AXES

SERIE 4E25 **Soft**

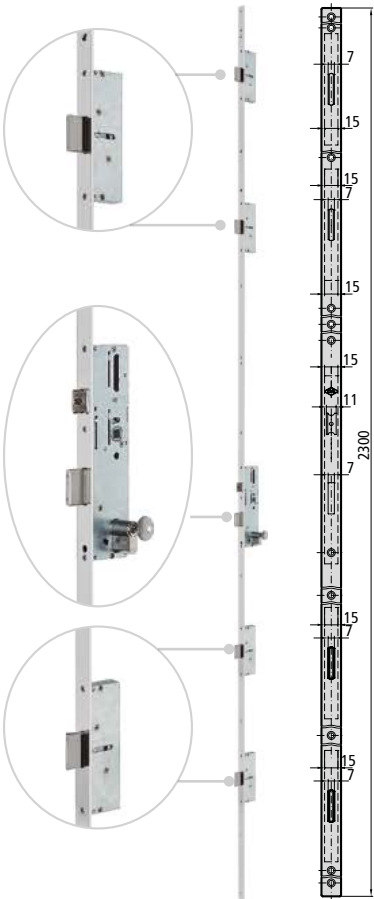

CHARACTERISTIC

- Maximum softness by means of gear mechanism
- 5 points lock with 22mm SS flat front plate
- 2300mm long front plate
- 11mm reversible and adjustable latch bolt
- Up and down points with sliding dead bolt
- Minimum stock: 3 versions in 1 lock (latch bolt/ roller/ dead bolt only)
- Sliding dead bolt
- Designed according to EN12209 and pr. EN15685
- Compatible with lon/DIN or short cam cylinders
- 15mm closed box
- 8mm square ruler
- Cylinder set screw

OPTIONAL ACCESSORIES

- Complete range of strike plates
- Complete range of cylinders
- Coupling kit and additional closing point
- Rollet kit to replace latch bolt (ref. CV1E5)

DESCRIPTION

REF.


MEASUREMENTS

B A

FINISH

FRONT PLATE CYLINDER

UNITS

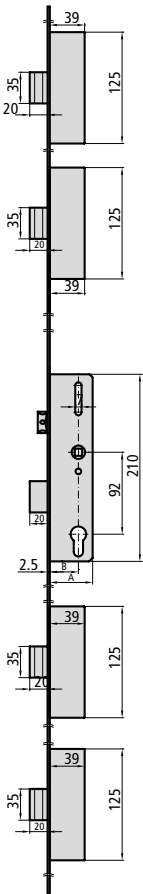

- Latch bolt and dead bolt
- Cylinder not included

4E25/30/6L	27	43	15/13,25	Al	1
4E25/35/6L	32	48	15/13,25	Al	1
4E25/40/6L	37	53	15/13,25	Al	1
4E25/45/6L	42	58	15/13,25	Al	1
4E25/50/6L	47	63	15/13,25	Al	1