

SWING DOORS

PANIC LOCK SLIDING DEAD BOLT

615E, 612E RANGE



CHARACTERISTIC


- Panic lock for aluminium and steel doors
- Reversible panic mechanism
- 22mm SS front plate
- 11mm reversible latch bolt
- Adjustable latch bolt, except in 25mm entrance
- 15 mm closed box
- 8mm square ruler
- **Operated by key and handle from outside. The key blocks or unblocks the handle**
- Cylinder set screw
- 85mm between axes (615E) or 92mm (612E)

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**
- **Electric strike plate** option

| DESCRIPTION | REF. | MEASUREMENTS | | CAM | FINISH | | UNITS |
|-------------|------|--------------|---|-----|-------------|----------|-------|
| | | B | A | | FRONT PLATE | CYLINDER | |

- Latch bolt and dead bolt
- Cylinder not included
- Lock with nut

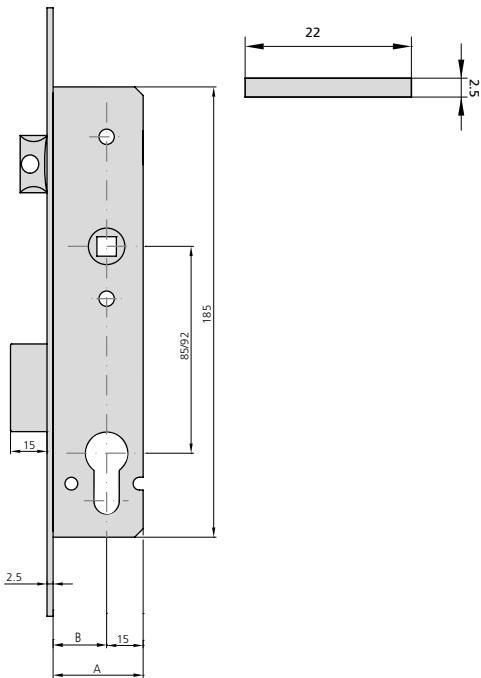

| | | | | | | | |
|-----------|----|----|----|----|--|---|----|
| 615E/25/6 | 22 | 37 | 15 | Al | | 1 | 20 |
| 615E/30/6 | 27 | 42 | 15 | Al | | 1 | 20 |
| 615E/35/6 | 32 | 47 | 15 | Al | | 1 | 20 |
| 612E/25/6 | 22 | 37 | 15 | Al | | 1 | 20 |
| 612E/30/6 | 27 | 42 | 15 | Al | | 1 | 20 |
| 612E/35/6 | 32 | 47 | 15 | Al | | 1 | 20 |