


# SWING DOORS / PIVOT DOORS

## SLIDING DEAD BOLT, 92 mm BETWEEN AXES

## 192 RANGE

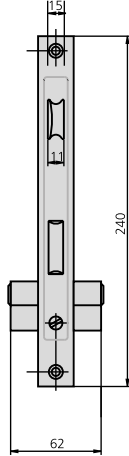

### CHARACTERISTIC

- 16 mm, 22 mm or 24 SS front plate
- 11mm reversible latch bolt
- 15 mm closed box
- 8mm square ruler
- Designed according to UNE-EN 12209:2004
- 2 nylon escutcheons ref. ES1984
- Cylinder set screw

### VERSIONS

- Spindle adapter kit


### OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**
- **Electric strike plate option**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS	
		B	A		FRONT PLATE	CYLINDER		

- Latch bolt and dead bolt
- Cylinder:
  - Long cam 101L3030/4

	P192/25/6	22	37	15	Al	CN	1	20
	P192/30/6	27	42	15	Al	CN	1	20
	P192/35/6	32	47	15	Al	CN	1	20

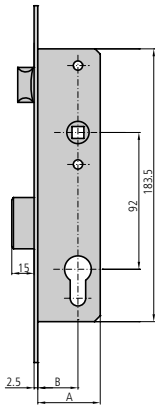


	192/25/6	22	37	15	Al	CN	1	20
	192/30/6	27	42	15	Al	CN	1	20
	192/35/6	32	47	15	Al	CN	1	20

	192/25/6AN	22	37	15	Al	CN	1	20
	192/30/6AN	27	42	15	Al	CN	1	20
	192/35/6AN	32	47	15	Al	CN	1	20

- Adjustable roller and dead bolt
- Cylinder:
  - Long cam 101L3030/4

	P192V25/6	22	37	15	Al	CN	1	20
	P192V30/6	27	42	15	Al	CN	1	20
	P192V35/6	32	47	15	Al	CN	1	20

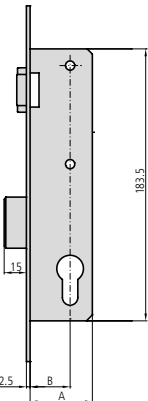

	192V25/6	22	37	15	Al	CN	1	20
	192V30/6	27	42	15	Al	CN	1	20
	192V35/6	32	47	15	Al	CN	1	20

	192V25/6AN	22	37	15	Al	CN	1	20
	192V30/6AN	27	42	15	Al	CN	1	20
	192V35/6AN	32	47	15	Al	CN	1	20