


SWING DOORS / PIVOT DOORS

SLIDING DEAD BOLT MULTIPOINT LOCK, 92mm BETWEEN AXES

2I2GB RANGE *inverse*

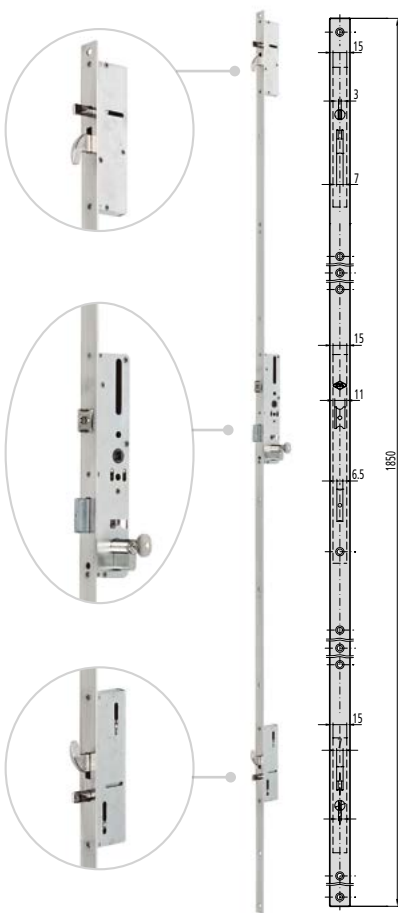

CHARACTERISTIC

- Multipoint lock with top and bottom shoot bolts operated by handle and locking the central point with the key
- 16mm, 22mm, 24mm SS flat front plate and 24,5*6 "U" shape SS front plate
- 1850mm long front plate
- 11mm reversible and adjustable latch bolt
- Central sliding dead bolt reinforced
- Up and down points with hook and bolt
- 15mm closed box
- 8mm square ruler
- Cylinder set screw

VERSIONS

- In option 2300 mm long front plate (4I2GB range)
- In option 1500 mm long front plate (5I2GB range)

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS
		B	A		FRONT PLATE	CYLINDER	
• Latch bolt and dead bolt • Cylinder not included	P2I2GB30/6	27	42	15	Al		1
	P2I2GB33/6	30	45	15	Al		1
	P2I2GB35/6	32	47	15	Al		1
	P2I2GB38/6	35	50	15	Al		1
	P2I2GB45/6	42	57	15	Al		1
	P2I2GB55/6	52	67	15	Al		1
	2I2GB30/6L	27	42	15	Al		1
	2I2GB33/6L	30	45	15	Al		1
	2I2GB35/6L	32	47	15	Al		1
	2I2GB38/6L	35	50	15	Al		1
	2I2GB45/6L	42	57	15	Al		1
	2I2GB55/6L	52	67	15	Al		1
	2I2GB30/6LAN	27	42	15	Al		1
	2I2GB33/6LAN	30	45	15	Al		1
	2I2GB35/6LAN	32	47	15	Al		1
	2I2GB38/6LAN	35	50	15	Al		1
	2I2GB45/6LAN	42	57	15	Al		1
	2I2GB55/6LAN	52	67	15	Al		1
	2I2GB30/6U	23	38	15	Al		1
	2I2GB33/6U	26	41	15	Al		1
	2I2GB35/6U	28	43	15	Al		1
	2I2GB38/6U	31	46	15	Al		1
	2I2GB45/6U	38	53	15	Al		1
	2I2GB55/6U	48	63	15	Al		1