


SWING DOORS / PIVOT DOORS

SLIDING DEAD BOLT MULTIPOINT LOCK

3I2, 3I5 RANGE **inverse**

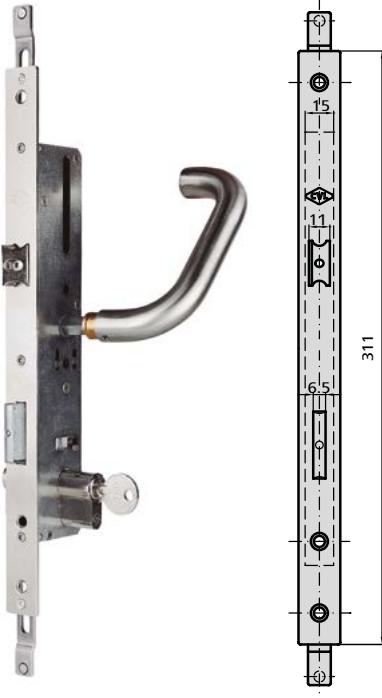


CHARACTERISTIC

- Multipoint lock with top and bottom shoot bolts operated by handle and locking the central point with the key
- 22 mm and 24 mm SS flat front plate or 24,5*6 "U" shape SS front plate
- 311 mm long front plate
- 11mm reversible and adjustable latch bolt
- Central sliding dead bolt reinforced
- 15mm closed box
- 8mm square ruler
- 85mm between axes (3I5) or 92mm (3I2)
- 2 nylon escutcheons ref. ES1984
- Cylinder set screw


OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS	
		B	A		FRONT PLATE	CYLINDER		

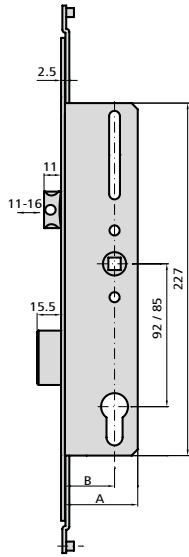


- Latch bolt and dead bolt
- Cylinder not included



3I2/30/6L	27	42	15	Al	1	10
3I2/33/6L	30	45	15	Al	1	10
3I2/35/6L	32	47	15	Al	1	10
3I2/38/6L	35	50	15	Al	1	10
3I2/45/6L	42	57	15	Al	1	10
3I2/55/6L	52	67	15	Al	1	10
3I5/30/6L	27	42	15	Al	1	10
3I5/33/6L	30	45	15	Al	1	10
3I5/35/6L	32	47	15	Al	1	10
3I5/38/6L	35	50	15	Al	1	10
3I5/45/6L	42	57	15	Al	1	10
3I5/55/6L	52	67	15	Al	1	10

* Other front plates upon request.

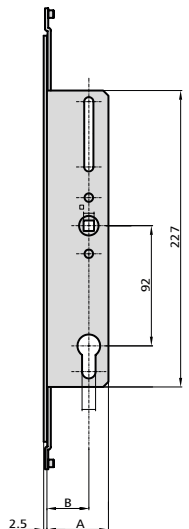

3I2F45/6L	42	57	15	Al	1	10
-----------	----	----	----	----	---	----