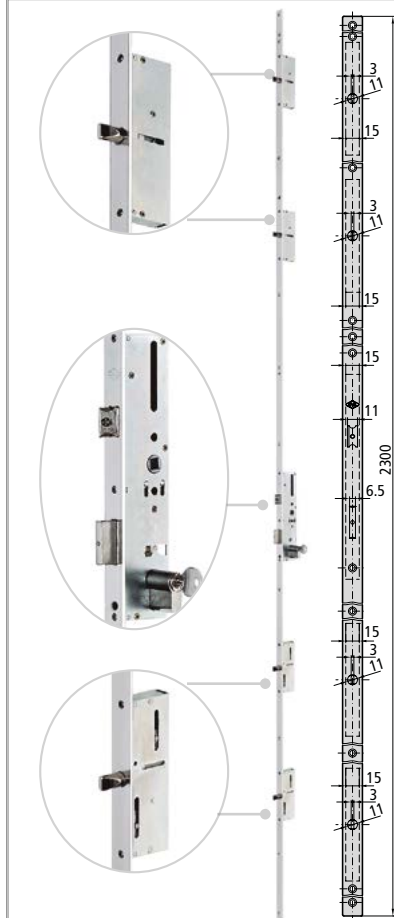


**SWING DOORS / PIVOT DOORS**
**SLIDING DEAD BOLT MULTIPOINT LOCK, 92mm BETWEEN AXES**
**4I25 RANGE *inve@se***

**CHARACTERISTIC**

- 5 points lock with closing facility turning the handle up and locking the central point with the key
- 22mm SS flat front plate
- 2300mm long front plate
- 11mm reversible and adjustable latch bolt
- Central sliding dead bolt reinforced
- Up and down points with bolt
- 15mm closed box
- 8mm square ruler
- Cylinder set screw


**VERSIONS**

- Coupling kit and additional closing point

**OPTIONAL ACCESSORIES**

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS
		B	A		FRONT PLATE	CYLINDER	

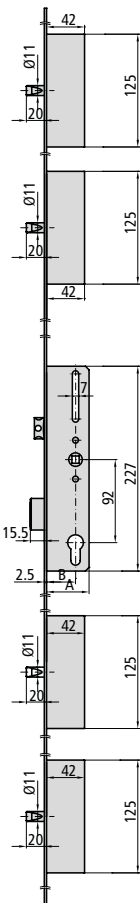

- Latch bolt and dead bolt
- Cylinder not included

4I25/30/6L	27	42	15	Al	1
4I25/33/6L	30	45	15	Al	1
4I25/35/6L	32	47	15	Al	1
4I25/38/6L	35	50	15	Al	1
4I25/45/6L	42	57	15	Al	1
4I25/55/6L	52	67	15	Al	1