

SWING DOORS / PIVOT DOORS

PANIC LOCK SLIDING DEAD BOLT

615, 612 RANGE

alupanic



CHARACTERISTIC



- Panic lock for aluminium and steel doors
- Reversible panic mechanism
- 22mm SS front plate
- 11mm reversible latch bolt
- Adjustable latch bolt, except in 25mm entrance
- 15 mm closed box
- 8mm square ruler
- **Operated by key and handle from outside**
- Cylinder set screw
- 85mm between axes (615) or 92mm (612)

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**
- **Electric strike plate option**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS
		B	A		FRONT PLATE	CYLINDER	

- Latch bolt and dead bolt
- Cylinder not included
- Lock with nut

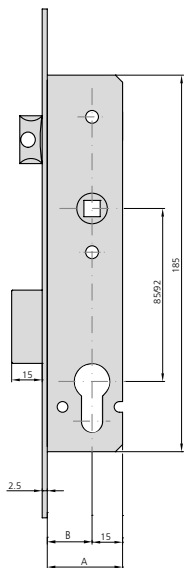

615/25/6	22	37	15	Al	1	20
615/30/6	27	42	15	Al	1	20
615/35/6	32	47	15	Al	1	20
612/25/6	22	37	15	Al	1	20
612/30/6	27	42	15	Al	1	20
612/35/6	32	47	15	Al	1	20