


SWING DOORS / PIVOT DOORS

SLIDING DEAD BOLT MULTIPOINT LOCK, 92mm BETWEEN AXES

2E2 RANGE *Soft*

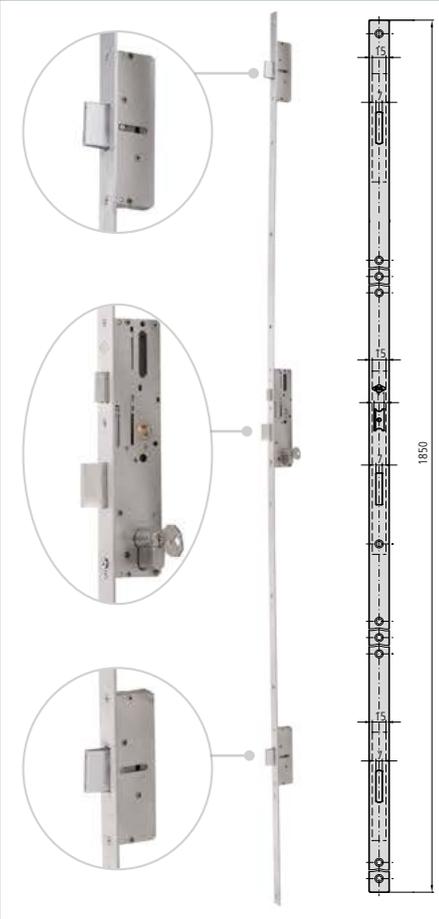

CHARACTERISTIC

- Maximum softness by means of gear mechanism
- 3 points lock with 16 mm, 22 mm and 24 mm SS flat front plate or 24,5*6 "U" shape SS front plate
- 1850mm long front plate
- 11mm reversible and adjustable latch bolt
- Minimum stock: 3 versions in 1 lock (latch bolt/ roller/ dead bolt only)
- Sliding dead bolt
- Designed according to EN12209 and pr. EN15685
- Compatible with Ion/DIN or short cam cylinders
- 15mm closed box
- 8mm square ruler
- Cylinder set screw

VERSIONS





- In option 2300 mm long front plate (4E2 range)
- In option 1500 mm long front plate (5E2 range)
- Roller kit to replace latch bolt (ref. CV1E5)

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS CAM		FINISH		UNITS
		B	A	FRONT PLATE	CYLINDER	

- Latch bolt and dead bolt
- Cylinder not included

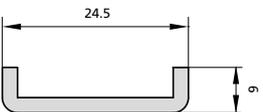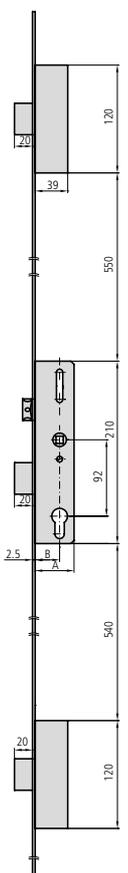

P2E2/30/6	27	43	15/13,25	Al	1
P2E2/35/6	32	48	15/13,25	Al	1
P2E2/40/6	37	53	15/13,25	Al	1
P2E2/45/6	42	58	15/13,25	Al	1
P2E2/50/6	47	63	15/13,25	Al	1
2E2/30/6L	27	43	15/13,25	Al	1
2E2/35/6L	32	48	15/13,25	Al	1
2E2/40/6L	37	53	15/13,25	Al	1
2E2/45/6L	42	58	15/13,25	Al	1
2E2/50/6L	47	63	15/13,25	Al	1
2E2/30/6LAN	27	43	15/13,25	Al	1
2E2/35/6LAN	32	48	15/13,25	Al	1
2E2/40/6LAN	37	53	15/13,25	Al	1
2E2/45/6LAN	42	58	15/13,25	Al	1
2E2/50/6LAN	47	63	15/13,25	Al	1
2E2/30/6U	22,5	38,5	15/13,25	Al	1
2E2/35/6U	27,5	43,5	15/13,25	Al	1
2E2/40/6U	32,5	48,5	15/13,25	Al	1
2E2/45/6U	37,5	53,5	15/13,25	Al	1
2E2/50/6U	42,5	58,5	15/13,25	Al	1


SWING DOORS / PIVOT DOORS

SLIDING DEAD BOLT MULTIPOINT LOCK, 92mm BETWEEN AXES

2E2 RANGE *Soft*

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS
		B	A		FRONT PLATE	CYLINDER	

- Adjustable roller and dead bolt
- Cylinder not included

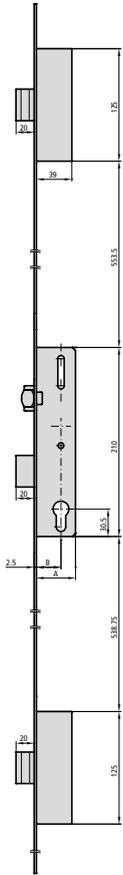

	2E2NV30/6L	27	43	15/13,25	Al	1
	2E2NV35/6L	32	48	15/13,25	Al	1
	2E2NV40/6L	37	53	15/13,25	Al	1
	2E2NV45/6L	42	58	15/13,25	Al	1
	2E2NV50/6L	47	63	15/13,25	Al	1
	2E2NV30/6LAN	27	43	15/13,25	Al	1
	2E2NV35/6LAN	32	48	15/13,25	Al	1
	2E2NV40/6LAN	37	53	15/13,25	Al	1
	2E2NV45/6LAN	42	58	15/13,25	Al	1
	2E2NV50/6LAN	47	63	15/13,25	Al	1
	2E2NV30/6U	22,5	38,5	15/13,25	Al	1
	2E2NV35/6U	27,5	43,5	15/13,25	Al	1
	2E2NV40/6U	32,5	48,5	15/13,25	Al	1
	2E2NV45/6U	32,5	48,5	15/13,25	Al	1
	2E2NV50/6U	42,5	58,5	15/13,25	Al	1