


SWING DOORS / PIVOT DOORS

MULTIPOINT WITH SLIDING DEAD BOLT, 85 mm BETWEEN AXES

2E5 RANGE *Soft*

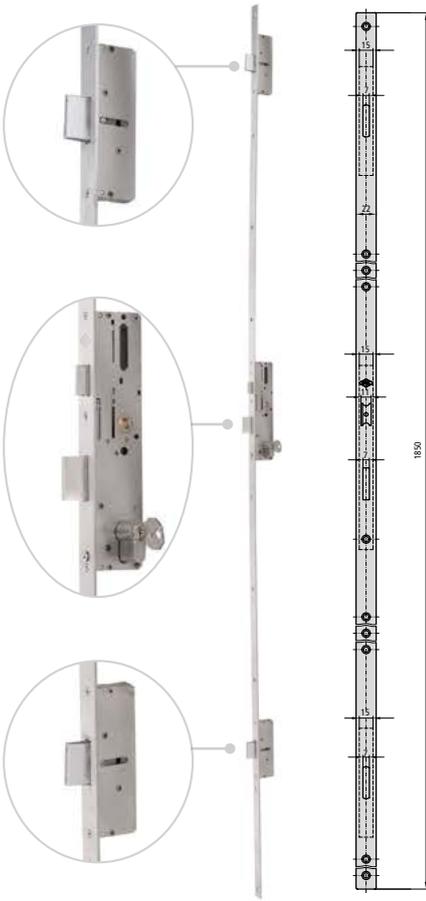

CHARACTERISTIC

- Maximum softness by means of gear mechanism
- 3 Points lock with 16 mm, 22 mm and 24 mm SS flat front plate or 24,5*6 "U" shape SS front plate
- 1850mm long front plate
- 11mm reversible and adjustable latch bolt
- Minimum stock: 3 versions in 1 lock (latch bolt/ roller/ dead bolt only)
- Sliding dead bolt
- Designed according to EN12209 and pr. EN15685
- Compatible with Ion/DIN or short cam cylinders
- 15mm closed box
- 8mm square ruler
- Cylinder set screw

VERSIONS

- In option 2300 mm long front plate (4E5 range)
- In option 1500 mm long front plate (5E5 range)
- Roller kit to replace latch bolt (ref. CV1E5)

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS
		B	A		FRONT PLATE	CYLINDER	
<ul style="list-style-type: none"> • Latch bolt and dead bolt • Cylinder not included 	2E5/30/6L	27	43	15/13,25	Al	1	
	2E5/35/6L	32	48	15/13,25	Al	1	
	2E5/40/6L	37	53	15/13,25	Al	1	
	2E5/45/6L	42	58	15/13,25	Al	1	
	2E5/50/6L	47	63	15/13,25	Al	1	
	2E5/30/6LAN	27	43	15/13,25	Al	1	
	2E5/35/6LAN	32	48	15/13,25	Al	1	
	2E5/40/6LAN	37	53	15/13,25	Al	1	
	2E5/45/6LAN	42	58	15/13,25	Al	1	
	2E5/50/6LAN	47	63	15/13,25	Al	1	
	2E5/30/6U	22,5	38,5	15/13,25	Al	1	
	2E5/35/6U	27,5	43,5	15/13,25	Al	1	
	2E5/40/6U	32,5	48,5	15/13,25	Al	1	
	2E5/45/6U	37,5	53,5	15/13,25	Al	1	
	2E5/50/6U	42,5	58,5	15/13,25	Al	1	