

SWING DOORS / PIVOT DOORS

SLIDING DEAD BOLT MULTIPOINT LOCK, 92mm BETWEEN AXES

2I2 RANGE *inve*®*ase*



CHARACTERISTIC

- 3 points lock with closing facility of the up and down points turning the handle up and locking the central point by the key
- 16mm, 22mm, 24mm SS flat front plate and 24,5*6 "U" shape SS front plate
- 1850mm long front plate
- 11mm reversible and adjustable latch bolt
- Central sliding dead bolt reinforced
- 15mm closed box
- 8mm square ruler
- Cylinder set screw

VERSIONS





- In option 2300 mm long front plate (4I2 range)
- In option 1500 mm long front plate (5I2 range)

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS
		B	A		FRONT PLATE	CYLINDER	

- Latch bolt and dead bolt
- Cylinder not included

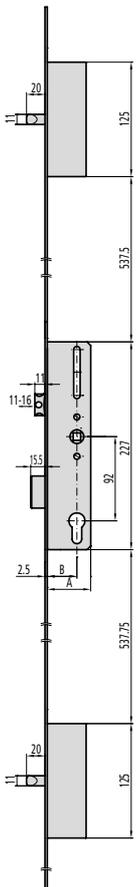

P2I2/30/6	27	42	15	Al	1
P2I2/33/6	30	45	15	Al	1
P2I2/35/6	32	47	15	Al	1
P2I2/38/6	35	50	15	Al	1
P2I2/45/6	42	57	15	Al	1
P2I2/55/6	52	67	15	Al	1
2I2/30/6L	27	42	15	Al	1
2I2/33/6L	30	45	15	Al	1
2I2/35/6L	32	47	15	Al	1
2I2/38/6L	35	50	15	Al	1
2I2/45/6L	42	57	15	Al	1
2I2/55/6L	52	67	15	Al	1
2I2/30/6LAN	27	42	15	Al	1
2I2/33/6LAN	30	45	15	Al	1
2I2/35/6LAN	32	47	15	Al	1
2I2/38/6LAN	35	50	15	Al	1
2I2/45/6LAN	42	57	15	Al	1
2I2/55/6LAN	52	67	15	Al	1
2I2/30/6U	22,5	37,5	15	Al	1
2I2/33/6U	25,5	40,5	15	Al	1
2I2/35/6U	27,5	42,5	15	Al	1
2I2/38/6U	30,5	45,5	15	Al	1
2I2/45/6U	37,5	52,5	15	Al	1
2I2/55/6U	47,5	62,5	15	Al	1