


MULTIPOINT WITH SLIDING DEAD BOLT, 85 mm BETWEEN AXES **2E5 RANGE Soft**

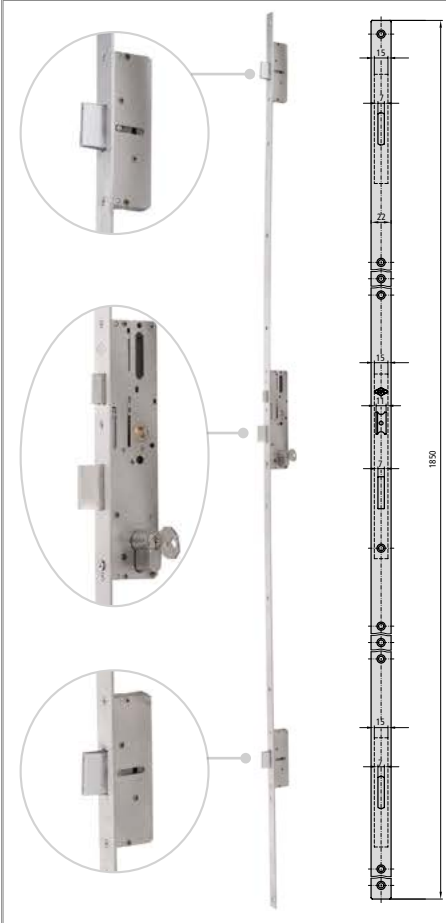

CHARACTERISTIC

- Maximum softness by means of gear mechanism
- 3 Points lock with 16 mm, 22 mm and 24 mm SS flat front plate or 24,5*6 "U" shape SS front plate
- 1850mm long front plate
- 11mm reversible and adjustable latch bolt
- Minimum stock: 3 versions in 1 lock (latch bolt/ roller/ dead bolt only)
- Sliding dead bolt
- Designed according to EN12209 and pr. EN15685
- Compatible with Ion/DIN or short cam cylinders
- 15mm closed box
- 8mm square ruler
- Cylinder set screw

VERSIONS


- In option 2300 mm long front plate (4E5 range)
- In option 1500 mm long front plate (5E5 range)
- Roller kit to replace latch bolt (ref. CV1E5)

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS CAM		FINISH		UNITS
		B	A	FRONT PLATE	CYLINDER	

- Latch bolt and dead bolt
- Cylinder not included

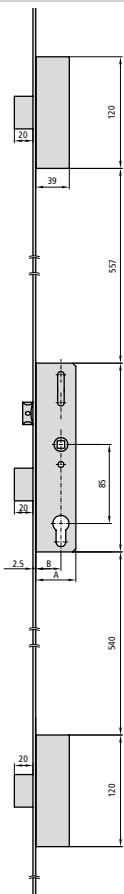

	2E5/30/6L	27	43	15/13,25	Al	1
	2E5/35/6L	32	48	15/13,25	Al	1
	2E5/40/6L	37	53	15/13,25	Al	1
	2E5/45/6L	42	58	15/13,25	Al	1
	2E5/50/6L	47	63	15/13,25	Al	1
	2E5/30/6LAN	27	43	15/13,25	Al	1
	2E5/35/6LAN	32	48	15/13,25	Al	1
	2E5/40/6LAN	37	53	15/13,25	Al	1
	2E5/45/6LAN	42	58	15/13,25	Al	1
	2E5/50/6LAN	47	63	15/13,25	Al	1
	2E5/30/6U	23	39	15/13,25	Al	1
	2E5/35/6U	28	44	15/13,25	Al	1
	2E5/40/6U	33	49	15/13,25	Al	1
	2E5/45/6U	38	54	15/13,25	Al	1
	2E5/50/6U	43	59	15/13,25	Al	1